

TEKNOSOUND

Sound-insulating foil coupled with FEF-based sheet

DESCRIPTION

Teknosound is specially developed for thermo-acoustic insulation of walls and ceilings in the civil sector, insulation of pipes in industrial applications and vibration reduction.

- Also available in adhesive format
- Also available in halogen-free format
- with low fume emissions


STANDARD DIMENSIONS

- Dimensions 1000x2000 or 1000x3000 mm
- Thickness: 12 mm

Other dimensions available on request.



CHARACTERISTICS	VALUE
WEIGHT	4 kg/m ² +/- 10%
COLOUR	black
WORKING TEMPERATURES	-40 / +110
FIRE BEHAVIOUR	EN 13501 Euroclass B-s3,d0

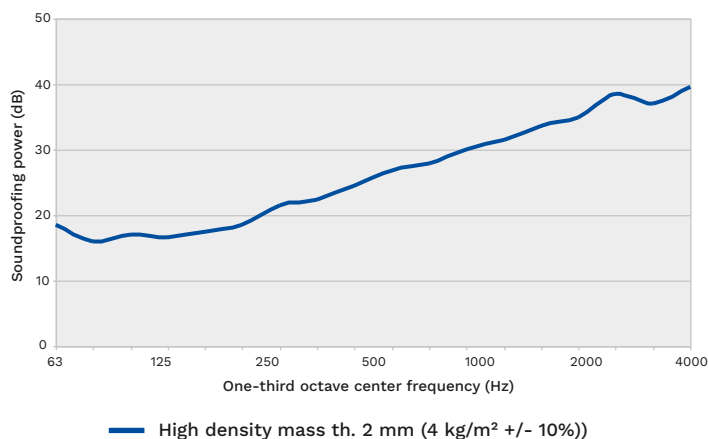

Use

Our products are packaged in cardboard boxes or plastic cases (according to type).

The product identification codes are labelled on each package.

Storage

It is recommended to store the product in a closed and dry location, protected from any atmospheric agents.



Reference standard:
En 14303:2009+A1:2013
Certificate No 0407-CPR-1230

TEKNISOL srl

via 1° Maggio, 38/38A - 20028 San Vittore Olona
Milano - Italy | 0039 0331 514605 | info@teknisol.it

